




AABB Trading LLC

FAG 32040-X Tapered Roller Bearings

Bearing No. 32040-X

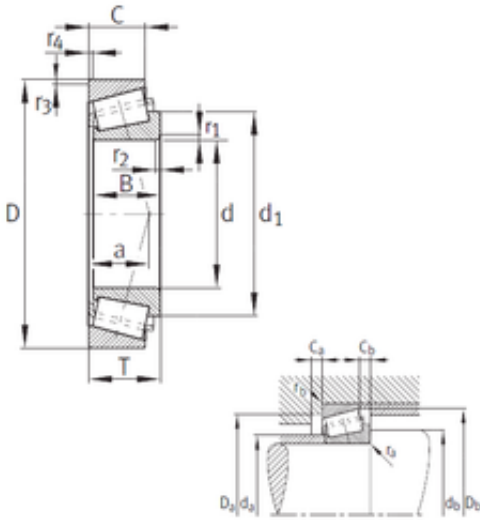

32040-X Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|---------------|
| Size | 200x310x70 mm |
| Bore Diameter | 200 mm |
| Outer Diameter | 310 mm |
| Width | 70 mm |
| d | 200 mm |
| D | 310 mm |
| T | 70 mm |
| B | 70 mm |
| C | 53 mm |
| a | 67 mm |
| d1 | 256 mm |
| r1 min. | 3 mm |
| r2 min. | 2,5 mm |
| r3 min. | 2,5 mm |
| r5 min. | 67 mm |
| Ca min. | 11 mm |
| Cb min. | 17 mm |
| da max | 221 mm |
| Da min | 273 mm |
| Da max. | 298 mm |
| db min | 212 mm |
| Db min. | 297 mm |
| ra max. | 3 mm |
| rb max. | 2,5 mm |
| Weight | 19 Kg |
| Basic dynamic load rating (C) | 760 kN |



AABB Trading LLC

| | |
|-------------------------------|-------------|
| Basic static load rating (C0) | 1370 kN |
| Fatigue load limit (Pu) | 154 |
| Reference speed | 1 290 r/min |
| Limiting speed | 2 100 r/min |
| Calculation factor (e) | 0,43 |
| Calculation factor (Y) | 1,39 |